

Features

Thank you for purchasing this product. "Simple Adjust" refers to a joint structure that allows users to make simple adjustments to the length of the bracelet by themselves. Before using Simple Adjust, read these Instructions carefully to ensure that you use the correct procedures. If you experience any difficulty whatsoever, return the watch to your retailer and ask them to adjust the bracelet.

Warning


Handling the bracelet parts

- During and after bracelet adjustment, always keep small parts, such as removed pins, springs and bracelet links, out of the reach of small children to avoid the risk of parts being swallowed.
- In the event that any parts are swallowed, immediately consult a physician and seek treatment.

Caution

- When adjusting the bracelet length, take care not to injure yourself with the pins, paper clip or other sharp objects.


Simple Adjust Joint Structure

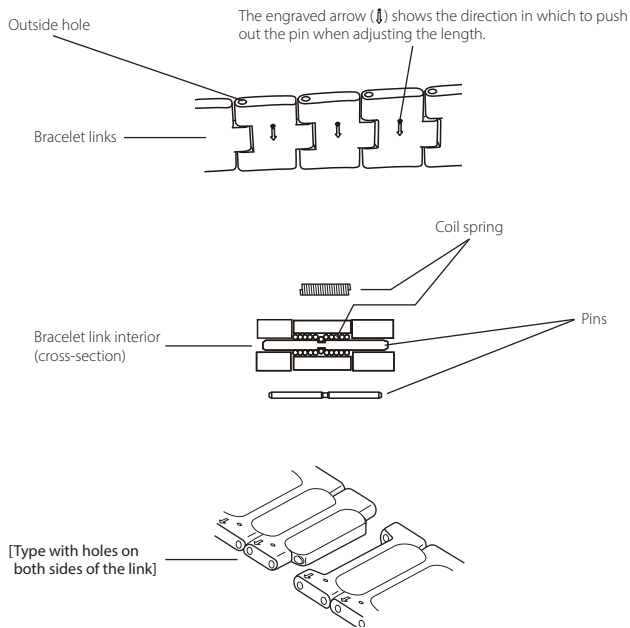

On bracelets with holes on both sides of the link, adjust the pin closest to the arrow. Do not remove the pin on the opposite side.


Guide to Length Adjustment

Prepare a paper clip by bending it into the shape shown in the illustration. If you do not have a paper clip handy, just use a similar tool with a stiff point.

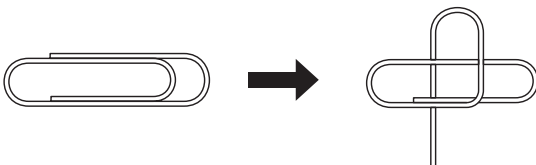


The length should allow you to comfortably slip one finger under the bracelet.

Hold the tool like this

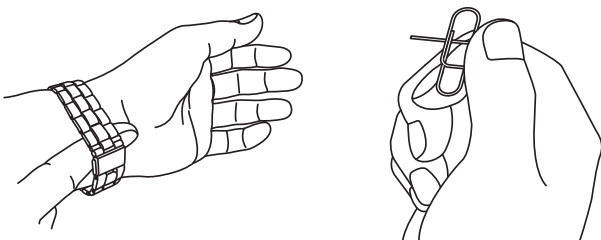


To Remove Links

- (1) The pins and coil springs are small and can easily roll away, so before you begin, put down a handkerchief or similar soft cloth to catch them.
 - (2) Once you have decided how many links to remove, use the paper clip to push out the pin in the direction indicated by the arrow engraved on the inside of the link.
- * If the pin is difficult to push out, bend and stretch the joints on the target link a few times and then try again.



When removing multiple links, remove them evenly from both sides of the clasp so that the bracelet remains balanced.


When removing 3 links, remove 1 link from the 12-o'clock side and 2 from the 6-o'clock side. This will make it easier to put your watch on.

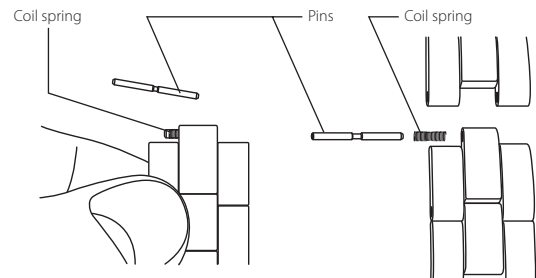


- (3) Place the removed pins and coil springs in a small dish or similar receptacle to avoid losing them.

To Reconnect Links

- (1) Push the coil spring fully into the hole in the link, fit the link into the next link and then push the pin into the joint from the outside hole.

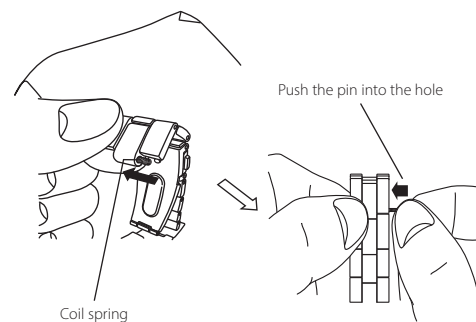

- (2) To finish, push the pin inwards from the top of the link. If the pin is not centered in the link, it could slip out while you are wearing the watch. Check the Simple Adjust joint structure to ensure that it is fitted correctly.

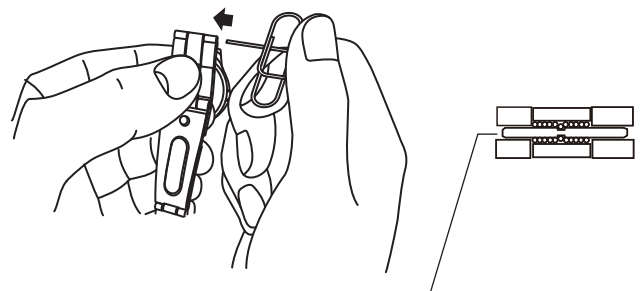

- (3) After adjusting the length, keep any removed parts (coil springs or pins) in a safe place.

* Your watch may differ from the product shown in the illustrations in these instructions.