


Adjustment Procedure for Sliding Clasps


⚠ If you are adjusting the clasp position yourself, take great care to avoid injury or damage.

- 1** Use a flathead screwdriver or similar tool as a lever to release the locked clasp.

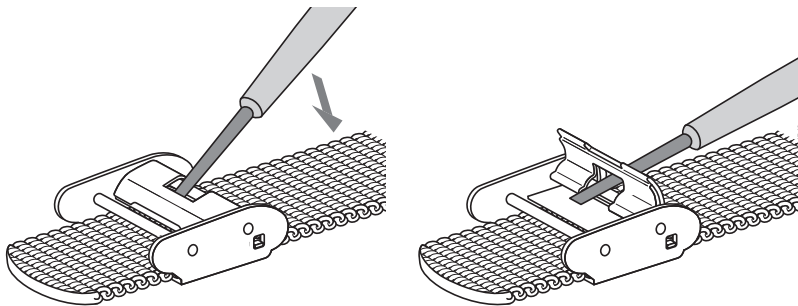


⚠ Using the adjustment procedure incorrectly risks damaging the bracelet components. Take careful note of the bracelet orientation, etc.


- 2** Adjust the bracelet length by moving the clasp.

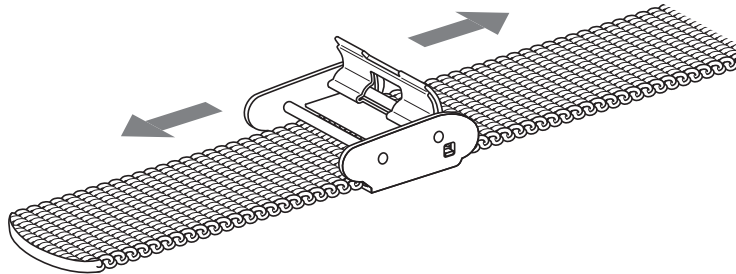

- 3** Confirm that the clasp is in the correct position and then lock it in place.

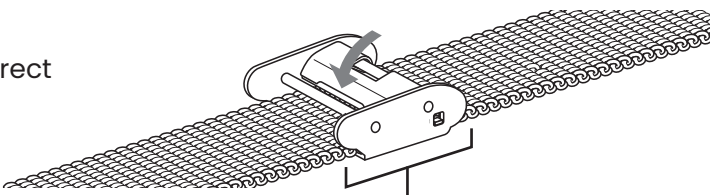


The flat plate visible through the small opening is centered in the opening.

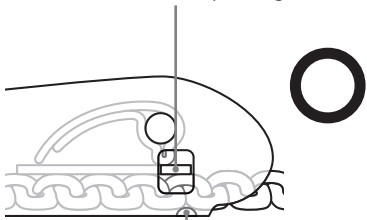

The protruding lugs on the back of the clasp are slotted into a groove in the bracelet.

The flat plate visible through the small opening is towards the top of the opening.

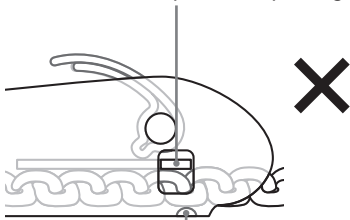

The protruding lugs on the back of the clasp are not slotted into a groove in the bracelet.

- 4** When you put the watch on, ensure that the hook is securely fitted onto the bar before closing the cover.

